





BLOOM LIGHTING GROUP

*Custom Lighting Solutions
and Design Elements*



Hospitality Lamp Manufacturer






Cutout size: L130 x W40 x H42mm

Code : UNO-BH-001
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Dock switch under head
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.


CE IP20 90° 350°



Cutout size: L160 x W40 x H60mm

Code : UNO-BH-011
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Metal push switch on plate
 Touch sensor switch is available
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.


CE IP20 90° 350°



Cutout size: L130 x W40 x H42mm

Code : UNO-BH-006
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Dock switch under head
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.


CE IP20 90° 350°



Cutout size: L160 x W40 x H60mm

Code : UNO-BH-016
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Metal push switch on plate
 Touch sensor switch is available
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.


CE IP20 90° 350°



Unit:mm

Cutout size: L160 x W40 x H60mm


Code : UNO-BH-017
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Metal push switch on plate
 Touch sensor switch is available
USB Outlet : 5V 2.1A fast charger
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.



Unit:mm


Cutout size: L155 x W55 x H40mm

Code : UNO-BH-035
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Toggle switch on plate
USB Outlet : 5V 2.1A fast charger
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.




Unit:mm

Cutout size: L150 x W55 x H45mm



Switch

Code : UNO-BH-041
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Dock switch under head
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.



Unit:mm


Cutout size: L95 x W60 x H45mm



USB interface


Code : UNO-BH-029
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Metal push switch on plate
USB Outlet : 5V 2.1A fast charger
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.






Cutout size: L95 x W55 x H45mm

Code : UNO-BH-029
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Toggle switch on plate
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.



Cutout size: D50 x H50mm


Code : UNO-BH-030
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Toggle switch on plate
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.



Cutout size: D50 x H50mm

Code : UNO-BH-059
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Metal push switch on plate
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.





Unit:mm

Code : UNO-BH-021

Input : AC100~240V

LED : CREE XPE 1~3W

CCT : 2700K/3000K/4000K

Beam Angle : 30° or customized

Lumen : 120lm


Driver : UL/SAA/TUV/CE listed

Plug : Hard wired or custom wall plug

Installation : Surface mounted

Switch : Slim rocker switch on plate

Finish : Matt black, matt white, chrome, satin nickel
matt nickel, brushed brass, black bronze etc.



Unit:mm

Code : UNO-BH-063

Input : AC100~240V

LED : CREE XPE 1~3W

CCT : 2700K/3000K/4000K

Beam Angle : 30° or customized

Lumen : 120lm

Driver : UL/SAA/TUV/CE listed

Plug : Hard wired or custom wall plug

Installation : Surface mounted

Switch : Slim rocker switch on plate

Finish : Matt black, matt white, chrome, satin nickel
matt nickel, brushed brass, black bronze etc.



Code : UNO-BH-027

Input : AC100~240V

LED : CREE XPE 1~3W

CCT : 2700K/3000K/4000K

Beam Angle : 30° or customized

Lumen : 120lm


Driver : UL/SAA/TUV/CE listed

Plug : Hard wired or custom wall plug

Installation : Surface mounted

Switch : Slim rocker switch on plate

Finish : Matt black, matt white, chrome, satin nickel
matt nickel, brushed brass, black bronze etc.




Unit:mm



LEFT



RIGHT



Unit:mm

Code : UNO-BH-036

Input : AC100~240V

LED : CREE XPE 1~3W

CCT : 2700K/3000K/4000K

Beam Angle : 30° or customized

Lumen : 120lm

Driver : UL/SAA/TUV/CE listed


Plug : Hard wired or custom wall plug

Installation : Surface mounted

Switch : Dock switch

Finish : Matt black, matt white, chrome, satin nickel
matt nickel, brushed brass, black bronze etc.








Unit:mm

Code : UNO-BH-064
Input : AC100~240V
LED : CREE XPE 1~3W / 6W SMD back mood
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120 lm for reading light
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Surface mounted
Switch : Slim rocker switch on plate
USB Outlet : Twin 5V 2.1A fast charger
Finish : Matt black, matt white, chrome, wood grain, satin nickel, matt nickel, brushed brass, etc.

CE, RoHS, ENEC, IP20, 90°, 350°, USB

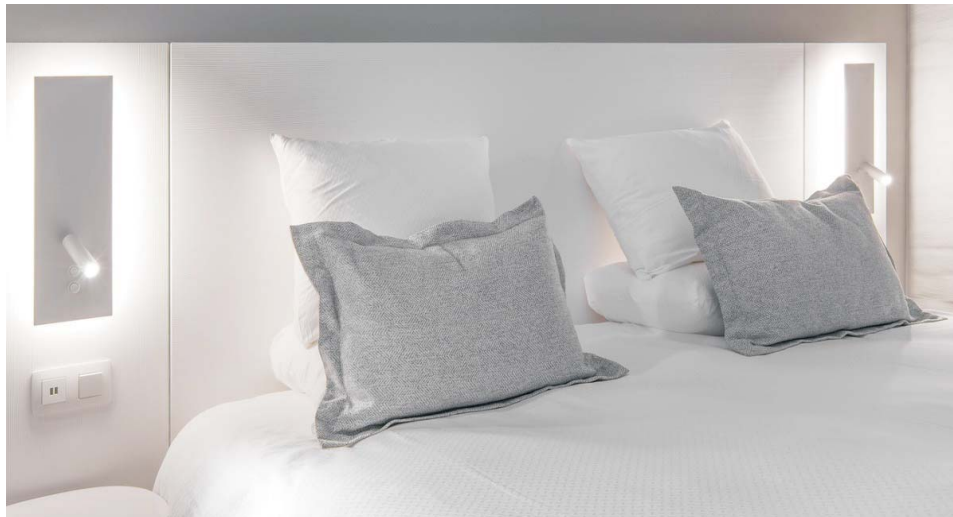


Unit:mm



Unit:mm

Code : UNO-BH-066/067
Input : AC100~240V
LED : CREE XPE 1~3W / 6W SMD back mood
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120 lm for reading light
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Surface mounted
Switch : Round rocker switch on plate
Finish : Matt black, matt white, chrome, wood grain, satin nickel, matt nickel, brushed brass, etc.


CE, RoHS, ENEC, IP20, 90°, 350°, USB



Unit:mm

Code : UNO-BH-065
Input : AC100~240V
LED : CREE XPE 1~3W / 6W SMD back mood
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120 lm for reading light
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Surface mounted
Switch : Round rocker switch on plate
USB Outlet : Twin 5V 2.1A fast charger
Shelf : 5V 1A Wireless charger
Finish : Matt black, matt white, chrome, wood grain, satin nickel, matt nickel, brushed brass, etc.

CE, RoHS, ENEC, IP20, 90°, 350°, USB



Cutout size: L100 x 30 x 30mm

Unit:mm

Code: UNO-BH-058

Input: AC100~240V

LED: CREE XPE 1~3W

CCT: 2700K/3000K/4000K

Beam Angle: 30° or customized

Lumen: 120lm

Driver: UL/SAA/TUV/CE listed

Plug: Hard wired

Installation: Surface mounted

Switch: Toggle switch on plate

Finish: Matt black, matt white, chrome, satin nickel, matt nickel, brushed brass, black bronze etc.

CE IP20

Code: UNO-BH-057

Input: AC100~240V

LED: CREE XPE 1~3W

CCT: 2700K/3000K/4000K

Beam Angle: 30° or customized

Lumen: 120lm

Driver: UL/SAA/TUV/CE listed

Plug: Hard wired

Installation: Surface mounted

Switch: Slim rocker switch on plate

Finish: Matt black, matt white, chrome, satin nickel, matt nickel, brushed brass, black bronze etc.

CE IP20

Code: UNO-BH-049

Input: AC100~240V

LED: CREE XPE 1~3W

CCT: 2700K/3000K/4000K

Beam Angle: 30° or customized

Lumen: 120lm

Driver: UL/SAA/TUV/CE listed


Plug: Hard wired

Installation: Surface mounted


Switch: Slim rocker switch on plate

Finish: Matt black, matt white, chrome, satin nickel, matt nickel, brushed brass, black bronze etc.

CE IP20



Unit:mm



Cutout size: D40 x H50mm

Unit:mm

Code: UNO-BH-054

Input: AC100~240V

LED: CREE XPE 1~3W

CCT: 2700K/3000K/4000K

Beam Angle: 30° or customized

Lumen: 120lm

Driver: UL/SAA/TUV/CE listed

Plug: Hard wired

Installation: Recessed

Switch: No switch

Finish: Matt black, matt white, chrome, satin nickel, matt nickel, etc.

CE IP20

Code: UNO-BH-055

Input: AC100~240V

LED: CREE XPE 1~3W

CCT: 2700K/3000K/4000K

Beam Angle: 30° or customized

Lumen: 120lm

Driver: UL/SAA/TUV/CE listed


Plug: Hard wired

Installation: Recessed

Switch: Metal push switch on plate

Finish: Matt black, matt white, chrome, satin nickel, matt nickel, etc.

CE IP20



Cutout size: D50 x H50mm

Unit:mm

Code: UNO-BH-056

Input: AC100~240V

LED: CREE XPE 1~3W

CCT: 2700K/3000K/4000K

Beam Angle: 30° or customized

Lumen: 120lm

Driver: UL/SAA/TUV/CE listed


Plug: Hard wired

Installation: Surface mounted


Switch: Toggle switch on plate

Finish: Matt black, matt white, chrome, satin nickel, matt nickel, etc.

CE IP20



Unit:mm



Unit:mm

Cutout size: D40 x H50mm


Code : UNO-BH-050
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Recessed
Switch : No switch
Finish : Matt black, matt white, chrome, satin nickel, matt nickel, etc.



Code : UNO-BH-051
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Recessed
Switch : Metal push switch on plate
Finish : Matt black, matt white, chrome, satin nickel, matt nickel, etc.




Code : UNO-BH-052
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Switch : Toggle switch on plate
Finish : Matt black, matt white, chrome, satin nickel, matt nickel, etc.




Unit:mm

Cutout size: D50 x H50mm




Unit:mm

Cutout size: D40 x H50mm



Unit:mm

Code : UNO-BH-046
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Mood Light : 1x E27 lamp max 40W
Shade : Fabric TBA
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Switch : Single rocker switch for Reading
Finish : Chrome, satin nickel, black chrome, etc.



Unit:mm

Code : UNO-BH-047
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Mood Light : 1x E27 lamp max 40W
Shade : Fabric TBA
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Switch : Twin rocker switch
Finish : Chrome, satin nickel, black chrome, etc.







UNO-BH-061




UNO-BH-062




Code : UNO-BH-061/062
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Mood Light : 1x E27 lamp max 40W
Shade : Fabric TBA
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Finish : Chrome, satin nickel,
 black chrome, etc.



UNO-BH-042



UNO-BH-043



Code : UNO-BH-042/043
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Mood Light : 1x E27 lamp max 40W
Shade : Fabric TBA
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Switch : Single metal push switch on plate
Finish : Chrome, satin nickel,
 black chrome, etc.













INSTALLATION INSTRUCTION







1. The installation of all electrical products should be undertaken with utmost care and qualified electrician should carry out the work to ensure compliance with any local wiring regulations.
2. Always ensure that the mains electrical supply is disconnected before installing the light.
3. Check the routing of electrical supply cable to avoid cutting it or damaging it during installation.
4. Make all electrical connections in accordance with the instructions attached to the light, ensure all connections are not loose with wire parts properly covered.
5. Ensure the light source is compatible with local voltage and follow any maximum wattage instructions shown on the light.
6. If you have any questions regarding the installation of ZEROUNO lights, please contact ZEROUNO for assistance.







CATALOG







Date: jUNE 26,2020







Image	Code	Dimensions(MM)	Finish	Input	Switch type	Installation	Description
	GZ-001A	Outer L155xW52 Cut out L142xW46xH43mm	Matt Black	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam Angle 30° CCT 2700K/3000K/4000K Driver including(CE/TUV/UL/SAA certificate)
	GZ-001B	Outer L155xW52 Cut out L142xW46xH43mm	Brushed black Brushed brass	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam Angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-001C	Outer L155xW52 Cut out L142xW46xH43mm	Matt Black Chrome	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam Angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-001D	Outer L155xW52 Cut out L142xW46xH43mm	Satin nickel	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam Angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)







	GZ-001E	Outer L155xW52 Cut out L142xW46xH43mm	Chrome	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam Angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-001F	Outer L155xW52 Cut out L142xW46xH43mm	Brushed brass	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam Angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-002A	L155xW52*D43 Outer Cut out L142xW46xH43mm	Matt Black	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam Angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-002B	L155xW52*D43 Outer Cut out L142xW46xH43mm	Brushed black Brushed brass	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam Angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-002C	L155xW52*D43 Outer Cut out L142xW46xH43mm	Matt Black Chrome	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam Angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-002D	L155xW52*D43 Outer Cut out L142xW46xH43mm	Satin nickel	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam Angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)







	GZ-002E	L155xW52*D43 Outer Cut out L142xW46xH43mm	Chrome	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam Angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-003A	L180xW52*D54 Outer Cut out L167xW46xH45mm	Brushed black	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-003B	L180xW52*D54 Outer Cut out L167xW46xH45mm	Brushed black Brushed brass	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-003C	L180xW52*D54 Outer Cut out L167xW46xH45mm	Matt black Chrome	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-003D	L180xW52*D54 Outer Cut out L167xW46xH45mm	Satin nickel	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-003E	L180xW52*D54 Outer Cut out L167xW46xH45mm	Bright chrome	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)







	GZ-004A	L180xW52*D54 Outer Cut out L167xW46xH45mm	Brushed black	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-004B	L180xW52*D54 Outer Cut out L167xW46xH45mm	Brushed black Brushed brass	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-004C	L180xW52*D54 Outer Cut out L167xW46xH45mm	Matt black Chrome	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-004D	L180xW52*D54 Outer Cut out L167xW46xH45mm	Satin nickel	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-004E	L180xW52*D54 Outer Cut out L167xW46xH45mm	Bright chrome	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-004F	L180xW52*D54 Outer Cut out L167xW46xH45mm	Black bronze	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)







	GZ-034A	L180xW52*D54 Outer Cut out L167xW46xH45mm	Bright chrome	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) USB outlet 5V 2.1A
	GZ-005A	L180xW52*D54 Outer Cut out L167xW46xH45mm	Chrome	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) USB outlet 5V 2.1A
	GZ-005B	L180xW52*D54 Outer Cut out L167xW46xH45mm	Chrome+black	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) USB outlet 5V 2.1A
	GZ-005C	L180xW52*D54 Outer Cut out L167xW46xH45mm	Satin nickel	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) USB outlet 5V 2.1A
	GZ-024A	L110*φ30mm headheadL190*W75*D26m m	Satin nickel	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) USB outlet 5V 2.1A
	GZ-024B	L110*φ30mm headheadL190*W75*D26m m	Brushed black	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) USB outlet 5V 2.1A




	GZ-024C	L110*φ30mm headheadL190*W75*D26mm	Golden	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) USB outlet 5V 2.1A
	GZ-025A	L110*30*30mm headheadL190*W75*D26mm	Matt white	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) USB outlet 5V 2.1A
	GZ-026A	φ110*L30mm head L150*W75*D26 Mount box	Matt white	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) USB outlet 5V 2.1A
	GZ-027A	φ50*L25mm head φ80*H50mmMount box	Matt white	Hard Wired AC100~240V 50~60Hz	no switch	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) USB outlet 5V 2.1A
	GZ-006A	L110xD30mm Head D80mmxH30mm Mount box	Brushed black	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-006B	L110xD30mm Head D80mmxH30mm Mount box	Matt black	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted



	QGZ-006C	L110xD30mm Head D80mmxH30mm Mount box	Brushed brass	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-006D	L110xD30mm Head D80mmxH30mm Mount box	Satin nickel	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-006E	L110xD30mm Head D80mmxH30mm Mount box	Chrome	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-006F	L110xD30mm Head D80mmxH30mm Mount box	Matt white	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-007A	125xW30xH30mm L141xW35xH30mm	Satin nickel	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-007B	125xW30xH30mm L141xW35xH30mm	Matt black	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted

	GZ-007C	125xW30xH30mm L141xW35xH30mm	Matt white	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-028A	110xW30xH30mm Head L50xW60xH30mm Mount box	Matt white	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-028B	110xW30xH30mm Head L50xW60xH30mm Mount box	Satin nickel	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-028C	110xW30xH30mm Head L50xW60xH30mm Mount box	Black bronze	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-009A	L110x110 plate L110xD30 head Cutout 95x60	Brushed black	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-009B	L110x110 plate L110xD30 head Cutout 95x60	Matt black	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)







	GZ-009C	L110x110 plate L110xD30 head Cutout 95x60	Matt white	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Toggle switch on plate Driver including(TUV/UL/SAA certificate)
	GZ-009D	L110x110 plate L110xD30 head Cutout 95x60	Chrome	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Toggle switch on plate Driver including(TUV/UL/SAA certificate)
	GZ-009E	L110x110 plate L110xD30 head Cutout 95x60	Satin nickel	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Toggle switch on plate Driver including(TUV/UL/SAA certificate)
	GZ-009F	L110x110 plate L110xD30 head Cutout 95x60	Brushed brass	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Toggle switch on plate Driver including(TUV/UL/SAA certificate)
	GZ-010A	D80xT6mm plate L110xD30mm head Cutout D50x50mm	Matt black	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Toggle switch on plate Driver including(TUV/UL/SAA certificate)
	GZ-010B	D80xT6mm plate L110xD30mm head Cutout D50x50mm	Chrome	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Toggle switch on plate Driver including(TUV/UL/SAA certificate)

	GZ-010C	D80xT6mm plate L110xD30mm head Cutout D50x50mm	Satin nickel	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Toggle switch on plate Driver including(TUV/UL/SAA certificate)
	GZ-010D	D80xT6mm plate L110xD30mm head Cutout D50x50mm	Black bronze	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Toggle switch on plate Driver including(TUV/UL/SAA certificate)
	GZ-013A	L180xW73mm Plate L110x30mm Head Cutout L163xW50xH45	Satin nickel	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Dock switch under light head Driver including(TUV/UL/SAA certificate)
	GZ-013B	L180xW73mm Plate L110x30mm Head Cutout L163xW50xH45	Brushed bronze	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Dock switch under light head Driver including(TUV/UL/SAA certificate)
	GZ-013C	L180xW73mm Plate L110x30mm Head Cutout L163xW50xH45	Matt black	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Toggle switch on plate Driver including(TUV/UL/SAA certificate)
	GZ-013D	L180xW73mm Plate L110x30mm Head Cutout L163xW50xH45	Matt white	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Toggle switch on plate Driver including(TUV/UL/SAA certificate)




	GZ-013E	L180xW73mm Plate L110x30mm Head Cutout L163xW50xH45	Chrome	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Toggle switch on plate Driver including(TUV/UL/SAA certificate)
	GZ-029A	L170xW68*45mm Outer Cutout L153xW55xH45mm	Matt black	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Dock switch under light head Driver including(TUV/UL/SAA certificate)
	GZ-029B	L170xW68*45mm Outer Cutout L153xW55xH45mm	Bronze	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Dock switch under light head Driver including(TUV/UL/SAA certificate)
	GZ-029C	L170xW68*45mm Outer Cutout L153xW55xH45mm	Chrome	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Dock switch under light head Driver including(TUV/UL/SAA certificate)
	GZ-016A	L200xW42mm	Brushed bronze	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-016B	L200xW42mm	Satin nickel	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-016C	L200xW42mm	Chrome	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted

	GZ-016D	L200xW42mm	Brass bronze	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-031A	L200xW80mm	Satin black	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-031B	L200xW80mm	Chrome	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-031C	L200xW80mm	Satin nickel	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-032A	L165*φ25 Head L165*W60*D43mm	matte black	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted
	GZ-033A	L90*φ30mm Head φ45mm base	black	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate) Surface mounted

	GZ-017A	L195xW80*D70mm Outer Cutout L178xW66xH66mm	Brushed bronze	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-017B	L195xW80*D70mm Outer Cutout L178xW66xH66mm	Chrome	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-017C	L195xW80*D70mm Outer Cutout L178xW66xH66mm	Brushed brass	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-017D	L195xW80*D70mm Outer Cutout L178xW66xH66mm	Satin nickel	Hard Wired AC100~240V 50~60Hz	Dock switch under light head	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-035A	120x45mm L400mm expand cutout:L113*W38*D42	Chrome	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-035B	120x45mm L400mm expand cutout:L113*W38*D42	Satin nickel	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Recessed	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)

	GZ-036A	L134xW60*D30mm L400mm expand	Matt black	Hard Wired AC100~240V 50~60Hz	Metal push switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-037A	φ80xH35mm L400mm expand	Chrome	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-038A	φ80xH35mm L400mm expand	Chrome	Hard Wired AC100~240V 50~60Hz	Toggle switch on plate	Surface mounted	3W Cree LED 195lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificate)
	GZ-021A	Base D100x30mm Width 250mm	Matt black	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate (No outer frame)	Surface mounted	3W CREE LED 130lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificated) Head and arm with swivel USB port available if need
	GZ-021B	Base D100x30mm Width 250mm	Matt white	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate (No outer frame)	Surface mounted	3W CREE LED 130lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificated) Head and arm with swivel USB port available if need
	GZ-021C	Base D100x30mm Width 250mm	Satin nickel	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate (No outer frame)	Surface mounted	3W CREE LED 130lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificated) Head and arm with swivel USB port available if need

	GZ-021D	Base D100x30mm Width 250mm	Brushed brass	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate (No outer frame)	Surface mounted	3W CREE LED 130lm Beam angle 30° CCT 2700K/3000K/4000K Driver including(TUV/UL/SAA certificated) Head and arm with swivel USB port available if need
	GZ-40A	W150xL450 Mount plate height 40mm	Matt white	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate to control seperately	Surface mounted	3W CREE LED 130lm Beam angle 30° Back ground light 6W SMD 2700K Driver including(TUV/UL/SAA certificated)
	GZ-41A	W150xL450 Mount plate height 40mm	Matt white	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate to control seperately	Surface mounted	3W CREE LED 130lm Beam angle 30° Back ground light 6W SMD 2700K Driver including(TUV/UL/SAA certificated) Twin USB port 5V 2.1A
	GZ-42A	W150xL450 Mount plate height 40mm	Wooden grain+ Matt white	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate to control seperately	Surface mounted	3W CREE LED 130lm Beam angle 30° Back ground light 6W SMD 2700K Driver including(TUV/UL/SAA certificated)
	GZ-43A	W150xL450 Mount plate height 40mm	Matt white	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate to control seperately	Surface mounted	3W CREE LED 130lm Beam angle 30° Back ground light 6W SMD 2700K Driver including(TUV/UL/SAA certificated) Switches to control seperately USB outlet, 5V, 2.1A Wireless charger on shelf
	GZ-43B	350x140mm 180x80x9mm for shelf	Wooden grain+ matt white	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate to control seperately	Surface mounted	3W CREE LED 130lm Beam angle 30° Back ground light 6W SMD 2700K Driver including(TUV/UL/SAA certificated) Switches to control seperately USB outlet, 5V, 2.1A Wireless charger on shelf

	GZ-066A	D140mmxH30mm for base D30mmxL105mm for head	Matt white	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate to control seperately	Surface mounted	3W CREE LED 130lm Beam angle 30° Back ground light 6W SMD 2700K Driver including(TUV/UL/SAA certificated)
	GZ-067A	130x130xH30mm for base D30mmxL105mm for head	Matt white	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate to control seperately	Surface mounted	3W CREE LED 130lm Beam angle 30° Back ground light 6W SMD 2700K Driver including(TUV/UL/SAA certificated)
	GZ-068A	Base H350*W60 Shade D200*H160	Chrome	Hard Wired AC100~240V 50~60Hz	Rocker switch on plate to control seperately	Surface mounted	3W CREE LED 195lm Beam angle 30° CCT 2700K/3000K/4000K E27*1 MAX 60W Driver including(TUV/UL/SAA certificated)